


AIMB-210

Intel® Atom™ Processor Mini-ITX with
VGA/LVDS, 6 COM, and Dual LAN

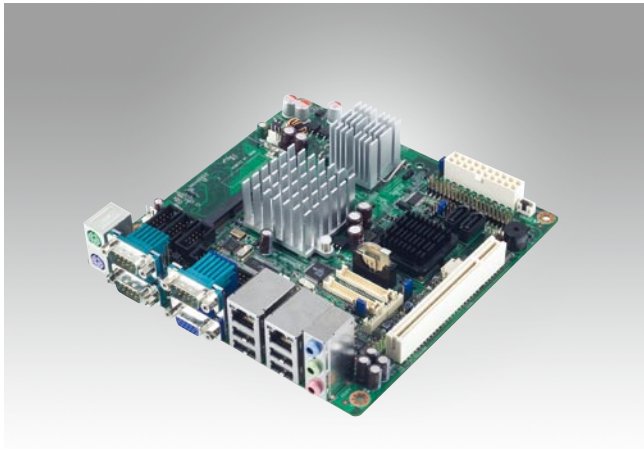

Features

- Intel® Atom™ Mini-ITX motherboard supports N270 1.6 GHz processor
- One 200-pin SODIMM up to 2 GB DDR2 533 SDRAM
- Supports dual display for VGA, LVDS, and TV-Out
- Built with 6 serial ports, 8 USB ports, CF, 2 LAN ports and TPM1.2 (F Version)
- Supports Embedded Software APIs and Utilities

Software APIs:


Utilities:

Specifications

Processor System	CPU (45 nm)	Intel Atom N270					
	Max. Speed	1.6 GHz					
	Front Side Bus	533 MHz					
	L2 Cache	512 KB					
	Chipset	Intel 945GSE + ICH7M					
	BIOS	Award 16 Mbit, SPI					
	Expansion Slot	PCI	32-bit/33 MHz, 1 slot				
Mini-PCI		-					
PCIe		-					
Memory	Technology	Single channel DDR2 533 MHz					
	Max. Capacity	2 GB					
	Socket	1 x 200-pin SODIMM					
Graphics	Controller	Intel 945GSE GMCH integrated Graphic Media Accelerator 950					
	VRAM	Shared system memory up to 224 MB SDRAM					
	1st LVDS	Single channel 18-bit/Dual channel 36-bit LVDS					
	2nd LVDS	Single channel 18/24-bit/Dual channel 36/48-bit LVDS, via Chronitel 7308B SDVO transmitter (F version)					
	TV-Out	Supports both S-video and composite video (TV-Out function is not supported during POST stage)					
	Dual Display	CRT + LVDS, CRT + TV-Out, LVDS + TV-Out					
Ethernet	Interface	10/100/1000 Mbps					
	Controller	GbE LAN1: Realtek 8111C; GbE LAN2: Realtek 8111C					
	Connector	RJ-45 x 2					
SATA	Max Data Transfer Rate	150 MB/s					
	Channel	2					
EIDE	Mode	EIDE (Ultra DMA 100)					
	Channel	1					
SSD	CompactFlash	Supports CompactFlash Type I/II					
Rear I/O	VGA	1					
	Ethernet	2					
	USB	4 (USB 2.0 compliant)					
	Audio	3 (Mic-in, Line-out, Line-in)					
	Serial	3 (2 x RS-232, 1 x RS-232/422/485)					
	Parallel	-					
	PS/2	2 (1 x keyboard and 1 x mouse)					
Internal Connector	LVDS & Inverter	1					
	USB	4 (USB 2.0 compliant)					
	Serial	3 (RS-232)					
	IDE	1					
	SATA	2					
	CompactFlash	1					
	Parallel	1					
	DIO	16-bit GPIO					
Watchdog Timer	Output	System reset					
	Interval	Programmable 1 ~ 255 sec/min					
Power Requirements	Power On	1.6 GHz Atom processor, 2 GB DDR2 SDRAM	+5 V	+3.3 V	+12 V	-12 V	+5 VSB
			1.96 A	1.21 A	0.19 A	0.06 A	0.28 A
	Operating	Non-Operating					
Environment	Temperature	Operating		0 ~ 60° C (32 ~ 140° F)			
		Non-Operating		-20 ~ 70° C (-4 ~ 158° F)			
Physical Characteristics	Dimensions	170 mm x 170 mm (6.69" x 6.69")					

* Minimum order quantity is required.

Board Diagram

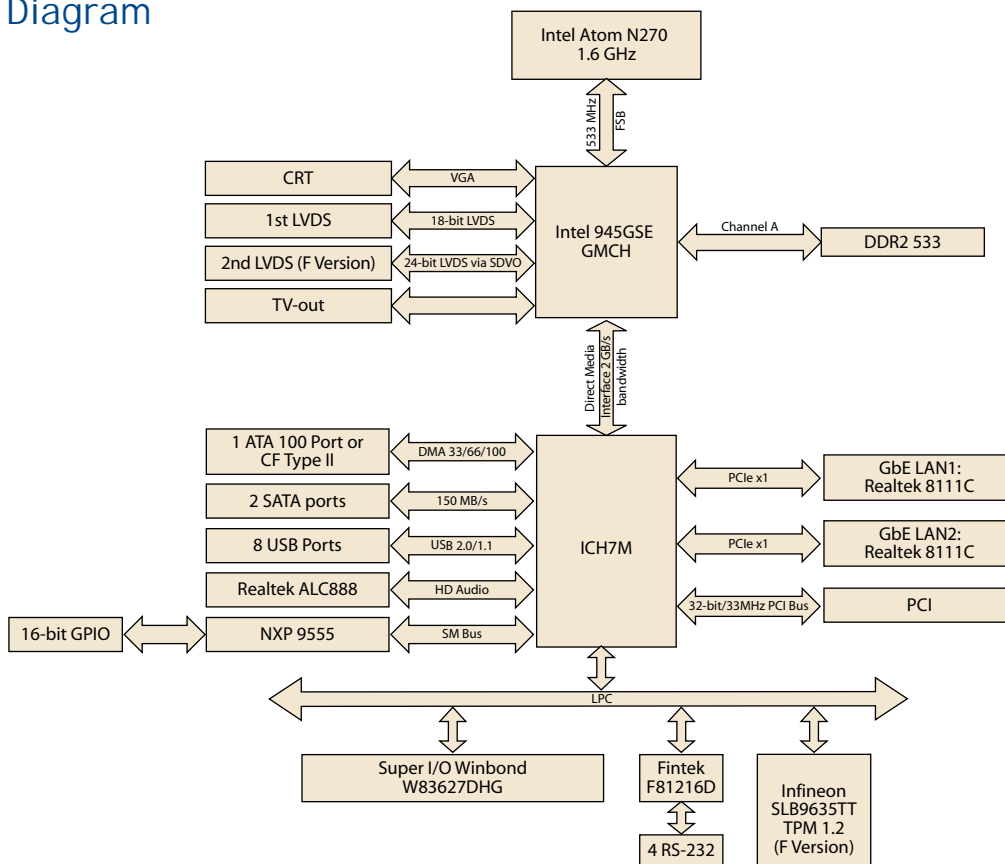

Ordering Information

Part Number	CPU	Chipset	GbE	COM	LVDS	TV-out	TPM
AIMB-210G2-S6A1E	Atom 1.6 GHz	945GSE	2	6	1, 18-bit	Yes	None
AIMB-210F-S6A1E	Atom 1.6 GHz	945GSE	2	6	2, 18/24-bit	Yes	Yes

Packing List

Description	Quantity
AIMB-210 SBC	1
IDE HDD cable (40-pin)	1
SATA HDD cable	2
SATA power cable	2
Serial port cable	3
CPU cooler	1
I/O port bracket	1
Startup manual	1
Driver CD	1

Bracket View



Optional Accessories

Part Number	Description
1700003195	USB cable with four ports, 17.5 cm
1700002204	USB cable with four ports, 27 cm
1700008461	USB cable with four ports, 30.5 cm
1700008809	Printer port cable, 25 cm, w/bracket
1700002331	TV-out cable

Embedded OS

OS	Part No.	Description
Win XPE	2070009632	XPE WES2009 AIMB-210 V4.0 ENG
	2070007914	XPE WES2009 AIMB-210 V4.0 24MUI
	2070009651	CE 5.0 Pro AIMB-210 V1.4 ENG
Win CE	2070006271	CE 6.0 Pro AIMB-210 V1.1 ENG (Need ODM BIOS)
	2070006272	IMG QNX V6.4 AIMB-210 V1.0 ENG (Audio is not supported)

