

ES-2117/2217

17" Open Frame and Rugged Panel Mount Monitor



Features

- 17" LCD supports 1024 x 768 pixels and wide operating temperature (-0 ~ 50 °C)
- Resistive, Capacitive, SAW or IR touchscreen and 3 mm tempered glass options
- Versatile mounting brackets
- Modular architecture for efficient integration
- Special back cover designed for 3.5" / 5.25" SBCs and ARK-1000 / 3000 / 4000 series box computers
- Sunlight readable option
- Ultra-high brightness up to 1000 nit with LED backlight technology option
- Rugged aluminum front bezel design (ES-2217)
- VGA or LVDS interface (S-Video: optional)

Introduction

The Advantech ES-2117/2217 Embedded Open Frame and Rugged Panel Mount Monitor series offer flexible options for LCD, touchscreen, signal interface and chassis mounting. The back cover has mounting holes for industry standard 3.5" and 5.25" SBCs; Advantech DSA-2100 and DSA-3300 Digital Signage Players; DVS-350 Digital Video Platforms; and ARK-1000, ARK-3000 and ARK-4000 series Embedded Box Computers. The series supports panel and VESA mounting, and is supplied with four versatile mounting brackets for different integration applications. The Advantech Display Solutions Selection Wizard (<http://www.advantech.com.tw/ePlatform/DS/dsw.aspx>) enables easy selection of model numbers by choosing the required options.

Specifications

- I/O Ports** 15-pin D-sub, DC power input, RS-232 port, Power Switch and OSD keys (Auto-tune, menu, decrease, increase)
- Display Input Signal** Analog RGB, 0.7 VP-P / 75 Ohm, optional LVDS
- Multi-Scan Mode** Multi-Scan Mode supports VGA, SVGA
- OSD Control** Keys: Auto-tune, menu, decrease and increase
Functions: Brightness, Contrast, Clock, Phase, Horizontal Position, Vertical Position and Sharpness
- Power** External 50 W power adapter, with AC 100 ~ 240 V input and DC +12 V @ 4.16 A output
- Dimensions (W x H x D)** Please refer to the product dimension diagram on next page
- Weight** ES-2117: 4.5 kg
ES-2217: 5.2 kg

Environment

- Operating Temperature** -0 ~ 50° C (32 ~ 122° F)
- Storage Temperature** -20 ~ 60° C (-4 ~ 140° F) for standard LCDs
- Humidity** 5 ~ 95% @ 40° C, non-condensing
- Shock** 10 G peak acceleration (11 ms duration)
- EMC Approved** CE FCC

Display

Feature	Standard / (OEM)	NEW	NEW
		Sunlight Readable	Ultra-high Brightness
Size	17"	17"	17"
Resolution (pixels)	1280 x 1024 SXGA	1280 x 1024 SXGA	1280 x 1024 SXGA
Number of Colors	16.2M	16.2M	16.2M
Viewing Angle (L/R/U/D)	70°/70°/70°/60°	70°/70°/70°/60°	70°/70°/70°/60°
Brightness (nit)	300	450	1000
Contrast Ratio	500:1	500:1	500:1
Response Time (ms)	8	8	8
Lamp Life (hrs)	50,000	50,000	50,000
Long-term Support	Yes	Yes	Yes
Anti-reflection	N/A	Yes	Yes


Touchscreen

Type	Analog Resistive	Capacitive	SAW	Infrared
Thickness	3.48 mm	3.18 mm	2.7 mm	3.0 mm
Resolution	4096 x 4096	1024 x 1024	4096 x 4096	4096 x 4096
Light Transmission	80%	85%	92%	92%
Controller Interface	RS-232/USB	RS-232	RS-232/USB	RS-232/USB
Power Consumption	+5 V @ 200 mA	+5 V @ 100 mA	+5 V @ 75 mA	+5 V @ 150 mA
Touch Lifetime	35 million hrs	225 million hrs	50 million hrs	MTBF 100,000 hrs
Driver OS Support	DOS, Linux, Mac, Windows 95/98/NT/ME/CE/2000/XP			


Dimensions

Unit: mm

ES-2117 CUT OUT

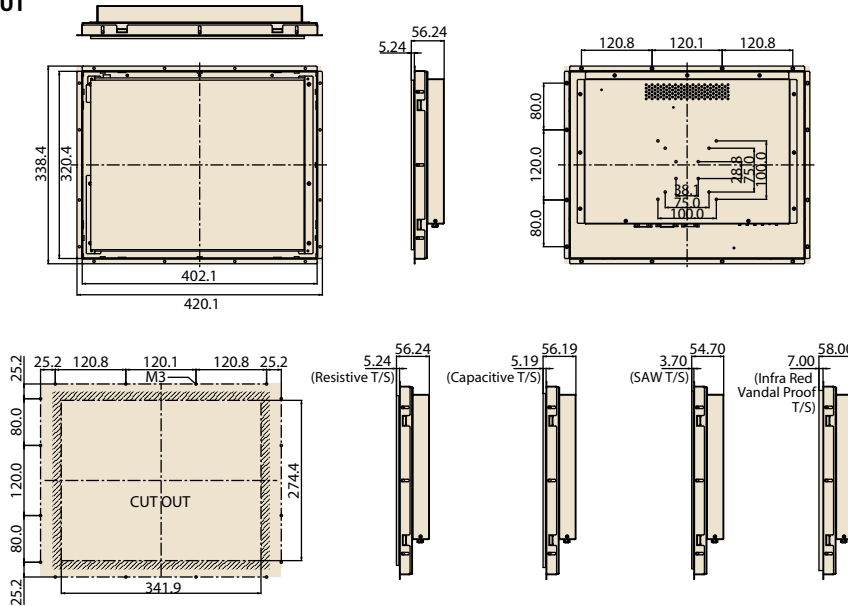

ES-2217

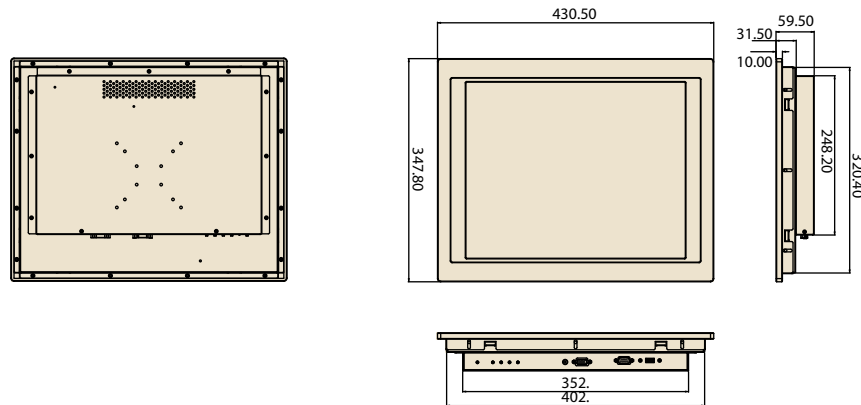

Ordering Information

Part No.	Type	Brightness (nit)	Interface	Touchscreen	Touch Interface	Anti-reflection
ES-2117G-VEAE	Open Frame	300	VGA	Tempered Glass	N/A	N/A
ES-2117R-VEAE	Open Frame	300	VGA	5 wire Resistive	RS232/USB	N/A
ES-2117C-VEAE	Open Frame	300	VGA	Capacitive	RS232	N/A
ES-2117R-LEAE-05	Open Frame	300	LVDS	5 wire Resistive	RS232/USB	N/A
ES-2217R-VXAE	Rugged Panel Mount	300	VGA	5 wire Resistive	RS232/USB	N/A
ES-2217C-VEA-SRE	Rugged Panel Mount	450	VGA	Capacitive	RS232	Yes
ES-2117V-VEA-HE	Open Frame	1000	VGA	Infrared	RS232	Yes

Notes:

- (1) Capacitive, SAW and Infrared touch panels are recommended for use with sunlight readable outdoor solutions.
- (2) The above list shows major part numbers for your reference. Please refer to the Advantech Display Solutions Selection Wizard (<http://www.advantech.com.tw/ePlatform/DS/dsw.aspx>) or CTOS to find part numbers and order your desired combination of LCD, touchscreen and signal interface.
- (3) Please use Display Solutions DTOS for special requirements.