



Features

- Five 6U CompactPCI slots
- Front and rear I/O support
- H.110 CT bus
- Device bay accommodates up to four devices
- Redundant power supply
- Hot-swap compliant backplane
- Hot-swap fans
- Integrated intelligent fault detection and alarm notification

Introduction

The MIC-3033/5 is a 4U-high enclosure with five CompactPCI™ slots for rack mounting. It supports H.110 CT bus and rear panel I/O for CTI applications. Its device bay accommodates peripheral devices such as hard disk drives, floppy disk drives and CD/DVD ROM drives. The MIC-3033/5 is specially designed for space-limited applications. The CompactPCI™ slots on the backplane are horizontal, allowing them to be accommodated in a 4U-height space.

Hot-swap Passive Backplane with H.110 CT Bus

The 6U-sized 5-slot backplane of the MIC-3033/5 supports 32-bit or 64-bit (optional) operation. The backplane complies with PICMG 2.1 Hot-swap Specification. Users can build hot-swap systems with hot-swappable CompactPCI boards and software.

The P4 connectors of peripheral slots are defined as H.110 CT bus for TDM signals of CTI applications. They comply with PICMG 2.5 Computer Telephony Specification. The P3 and P5 connectors on the backplane are used for rear panel I/O. Users can connect devices to the rear transition boards, and the front boards are free to be inserted and removed without any wiring hassles.

Optimal for Cooling Airflow with Hot-swap Fans

A space next to the card slots contains one 86-CFM high-speed fan to provide forced cooling air into the system. One 15 CFM fan locating on the rear side pushes hot air out of the system. Both fans are hot-swappable, allowing users to replace the fans without interrupting the operation of the system. The fan's tachometer output enables the alarm module to monitor the speed of the fans. A protective circuit has been designed into the fan backplane to reduce spikes and noise during fan hot-swapping. This design allows users to replace new fans safely without turning the system off.

Easy Access Device Bay


The device bay accommodates up to four devices, including one 3.5"

floppy disk drive, one slim-type CD-ROM drive, and two 3.5" hard disk drives. Standard HDDs and FDDs can be installed, so there is no need for expensive special devices.

System Fault Detection and Alarm Notification

The MIC-3033/5 integrates an intelligent alarm module, the MIC-3920, to monitor and report internal conditions. The system's status (including temperature, power voltage levels and fan speed) can be easily checked from its front panel LEDs. Three relays can be activated by different alarm levels to drive external devices. The alarm module's serial port can be configured as RS-232 or RS-485 or linked to a modem, to communicate to a remote host for real time monitoring, module configuration and alarm reporting. The serial port connector and relay terminals are located on the back of the enclosure for easy access.

An easy-to-use software utility is shipped with MIC-3033/5 to minimize the time for system integration. "PC Sentry" can run under Windows 95/98/NT. It allows the system host to communicate with one or more alarm modules through the serial port for configuration, alarm level setting, real-time status display, alarm event logging, and so on.

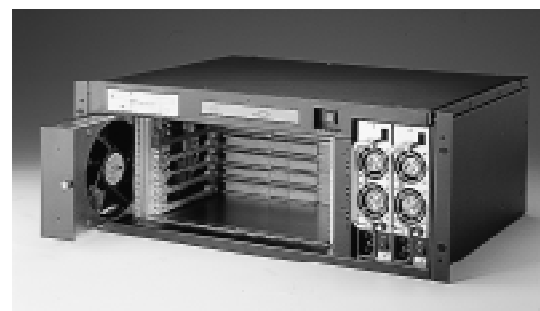


Five horizontal CompactPCI™ slots



Specifications

- **Construction:** Aluminum frame, galvanized sheet steel
- **Device bay:** Accommodates up to four devices, including one 3.5" floppy disk drive, one slim-type CD-ROM drive, and two 3.5" hard disk drives
- 12-slot space (48 TE), 5 CompactPCI™ slots, including one system slot and four peripheral slots
- 32-bit CompactPCI bus (64-bit available upon request)
- H.110 CT bus complies with PICMG 2.5 R1.0 Computer Telephony Specification
- "Hot swap" platform complies with PICMG 2.1 R 1.0 Hot Swap Specification
- **Dimensions (W x H x D, mounting flanges not included):** 440 x 177 x 342 mm (17.3" x 7" x 13.5")
- **Weight:** 10 kg (22 lb)
- **Operating temperature:** 0 ~ 50° C (32 ~ 122° F)
- **Relative humidity:** 10 ~ 95% @ 40° C, non-condensing
- **Shock:** 10 G (operating); 30 G (storage/transit)
- **Random vibration:** 1.0 Grms
- **MTBF:** 100,000 hours @ 70% load
- **Safety:** UL/CUL/TUV/CE

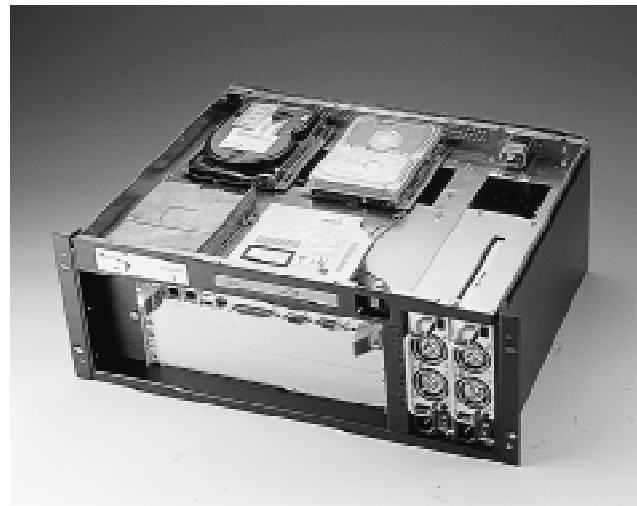

Upper view of the device bay

Backplane

- 5 CompactPCI™ slots (one system slot and 4 peripheral slots)
- **Bus width:** 32-bit (64-bit upon request)
- Supports H.110 CT bus
- 8-layer PCB, 3.0 mm thick
- Separate power and ground planes
- Two ATX power connectors for connecting standard ATX power supplies
- Complies with PICMG 2.0, Ver. 2.1 CompactPCI Specification and PICMG 2.1, Ver. 1.0 Hot Swap Specification
- Complies with PICMG 2.5, Ver. 1.0 Computer Telephony Specification
- **V I/O voltage:** 3.3 V or 5 V, jumper selectable
- Logic Ground and Chassis Ground can be isolated or common
- **Dimensions (W x H):** 122 x 262.2 mm

Fan Tray Module

- **Air flow:** One 86-CFM fan (front), one 15 CFM fan (rear)
- **Power consumption:** 0.45 A @ 12 V, 0.09 A @ 12 V
- **Rated fan speed:** 2170/4500 rpm
- **Life span:** 50,000 hours @ 25° C

Redundant Power Supply

- **Input:** 90 ~ 264 V_{AC} @ 47 ~ 63 Hz
- **Output:** +3.3 V @ 22 A, +5 V @ 30 A, +12 V @ 13 A, -12 V @ 1 A
- **Minimum load:** +3.3 V @ 0.3 A, + 5 V @ 2 A, +12 V @ 0.5 A
- **Max output:** 300 W + 300 W redundant, 160 W for 5 V and 3.3 V

Ordering Information

- **MIC-3033/5-4R:** CompactPCI™ chassis with 5-slot backplane, fan tray module, redundant power supply, and alarm module