


PCI-1202U

2-port AMONet™ RS-485 Master Card

NEW

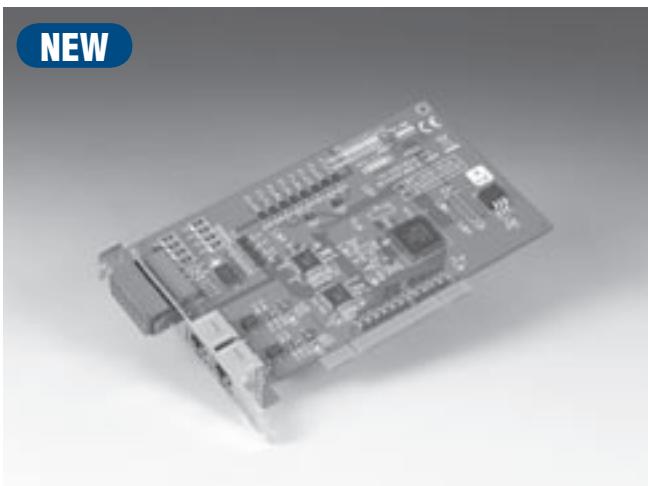

Features

- Max. 20 Mbps transfer rate
- 2 independent AMONet™ RS-485 Master Rings
- Max. 128 AMONet RS-485 slave modules supported
- Programmable digital input to notify events
- Easy installation with RJ45 phone jack and LED diagnostic

Introduction

PCI-1202U is a PCI interface card which supports two AMONet RS-485 master rings, and transfers data between host and slaves directly without any operations in between. Each ring can control up to 2048 I/O points, 64 axes, or a combination of I/O points and axes for motion control. The ring can support up to 20 Mbps transfer rate and a maximum communication distance of up to 100 meters.

The communication between master and slave is based on a customized RS-485 solution that saves wires, covers a long distance, supports high-speed communication and has time-deterministic features. The communication interface between master and host PC is accomplished by memory mapping. Various functions can be chosen on the slave modules, and standard industrial DIN-rail mounting design makes it easy to distribute them in the field. The master collects information from slave modules and publishes the information to its host PC.

Specifications

AMONet RS-485 Motion Control

- **AMONet RS-485 Rings** 2
- **Interface** Half duplex RS-485
- **Cable Type** CAT5 UTP/STP Ethernet cable
- **Surge Protection** 10 kV
- **Transmission Speeds** 2.5, 5, 10, and 20 Mbps
- **Data Flow Control** Automatic
- **Communication Distance** 100 m @ 20 Mbps w/32 slave modules
- **Slave Module Support** Digital I/O, Motion Control, Analog I/O

Isolated Digital Input

- **Channels** 8
- **Input Voltage** Dry contact (but need External Vcc)
- **Isolation Protection** 2,500 V_{DC}
- **Input Resistance** 2.4 kΩ @ 0.5 W

Isolated Digital Output

- **Channels** 4
- **Output Type** Open collector
- **Isolation Protection** 2,500 V_{DC}
- **Output Voltage** 5 ~ 30 V_{DC}
- **Sink Current** 1 ch: Max. 1 A
4 ch: Max. 1.1 (total)

General

- **Bus Type** PCI V2.2
- **Certifications** CE
- **Connectors** RJ45 x 2

- **Dimensions** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** +5 V_{DC} @ 0.5 A typical
- **Humidity** 5 ~ 95% RH, non-condensing (IEC 68-2-3)
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F)
- **Storing Temperature** -20 ~ 85° C (-4 ~ 185° F)

Ordering Information

- **PCI-1202U** 2-port AMONet RS-485 Master Card
- **AMAX-2210** 1-axis AMONet RS-485 Motion Slave Module
- **AMAX-2211/PMA** 1-axis AMONet RS-485 Motion Slave Module for Panasonic Minas A
- **AMAX-2212/J2S** 1 axis AMONet RS-485 Motion Slave Module for Mitsubishi MR-J2S
- **AMAX-2213/YS2** 1-axis AMONet RS-485 Motion Slave Module for Yaskawa Sigma-II
- **AMAX-2241/PMA** 4-axis AMONet RS-485 Motion Slave Module for Panasonic Minas A
- **AMAX-2242/J2S** 4-axis AMONet RS-485 Motion Slave Module for Mitsubishi MR-J2S
- **AMAX-2243/YS2** 4-axis AMONet RS-485 Motion Slave Module for Yaskawa Sigma-II
- **AMAX-2752** 32-ch Isolated Digital Input Module
- **AMAX-2754** 32-ch Isolated Digital Output Module
- **AMAX-2756** 16/16-ch Isolated Digital Input/Output Module
- **AMAX-2730** 8/8-ch Isolated Digital Input/Output Module
- **AMAX-2710** 12-bit, 100kS/s, 16-ch Analog Input, 4-ch Analog Output Slave Module
- **PCL-10120M-2** SCSI 20-pin cable, 2 m (Optional for AMAX-2212/J2S)
- **PCL-10150M-2** SCSI 50-pin cable, 2 m (Optional for AMAX-2211/ PMA and AMAX-2213/YS2)