



WISE-4000/WISE-4000D

3-channel Digital Input, 3-channel Digital Output, and 8-channel Analog Input GPRS Module

Quad-band Automation Controller

Features

- Built-in Web Server for IF-THEN-ELSE rule setting
- Built-in IF-THEN-ELSE rule engine for logic operation
- No more programming. Just click and get done!
- Support IO, Counter, Timer, Email operations
- Modbus/TCP Protocol for SCADA Software Seamless Integration
- 10/100 Base-TX Ethernet
- Support GPRS/GSM: Quad-band 850/900/1800/1900 MHz
- I/O: 3 channels DI, 3 channels DO, 8 channels AI
- Support SD storage card
- 128*64 dots LCM display (only for WISE-4000D)



Introduction

WISE (Web Inside, Smart Engine) is a product series developed by ICP DAS that functions as control units for use in remote logic control and various industrial applications. WISE offers a user-friendly and intuitive web site interface that allows users to implement IF-THEN-ELSE control logic on controllers just a few clicks away; no programming is required. With its powerful and easy-to-use features, it will minimize the learning curve, shorten time to market and dramatically reduce the effort and cost spent on system development.

The WISE-4000 is a M2M (Machine to Machine) embedded controller equips with a cellular transceiver that enables integrated monitoring of industrial equipments or environments and allows updated status information being sent to the backend monitoring system. WISE-4000 supports Modbus/TCP protocol that allows seamless integration with SCADA software available. It features 3 digital inputs, 3 digital outputs and 8 analog inputs. WISE-4000 also features GPRS/GSM & Ethernet that provide a highly-flexible solution for transferring monitoring data by GPRS, SMS or Ethernet interface. Integrate with IF-THEN-ELSE rule engine, WISE-4000 even provides more powerful functions such as Schedule - Send SMS - Send e-mail - Timer & I/O operation for use in various industrial applications.

Applications

Building Automation, Factory Automation, Machine Automation, Remote Maintenance, Remote diagnosis and Testing Equipment, etc.

I/O Specifications

| Digital Input | | |
|-------------------|--|-----------------|
| Input Channels | 3 | |
| Input Type | Source(Dry Type), Common Ground | |
| On Voltage Level | +3.5 V _{DC} ~ +30 V _{DC} | |
| Off Voltage Level | +1 V _{DC} Max. | |
| Isolated Voltage | Non-isolated | |
| Counters | Max. Count | 65535 (16 bits) |
| | Max. Input Frequency | 50 Hz |
| | Min. Pulse Width | 10 ms |
| Digital Output | | |
| Output Channels | 3 | |
| Output Type | Open Collector (Sink/NPN) | |
| Load Voltage | +30 V _{DC} Max. | |
| Load Current | 100 mA Max. | |
| Isolated Voltage | Non-isolated | |
| Counters | Max. Count | 65535 (16 bits) |
| | Max. Input Frequency | 50 Hz |
| | Min. Pulse Width | 10 ms |
| Analog Input | | |
| Input Channels | 8 | |
| Input Range/Type | 0~20 mA | |
| Resolution | 12-bit | |
| Sampling Rate | 1 KHz max. (Read one channel) | |

System Specifications

| Item | WISE-4000 | WISE-4000D |
|-------------------------|--|---|
| CPU | 16-bit CPU | |
| SRAM/Flash | 512K/512K, real time clock, watchdog timer | |
| NVRAM | 31 bytes, battery backup, data valid up to 10 years | |
| EEPROM | 16 KB | |
| Communication Interface | | |
| COM ports | COM1:5-wire RS-232; COM2: RS-485; COM3:3-wire RS-232 | |
| Ethernet | 10/100 Base-TX Ethernet controller | |
| GPRS Interface | | |
| Frequency Band | Quad-band 850/900/1800/1900 MHz | |
| GPRS connectivity | GPRS class 10/8; GPRS station class B | |
| DATA GPRS | Downlink transfer: Max. 85.6 kbps; Uplink transfer: Max 42.8kbps | |
| SMS | MT, MO, CB, Text and PDU mode | |
| LCD Interface | | |
| General | Effective display area | 80.61 mm x 14.37 mm (W x H) |
| | Module Dimension | 93 mm x 70 mm x 1.6 mm (W x H x T) |
| Life Time | - | Expected life is more than 100,000 hours under normal operation |
| Power | | |
| Protection | Power reverse polarity protection | |
| Frame Ground Protection | ESD, Surge, EFT, Hi-Pot | |
| Power Requirement | 15W; Unregulated +10 V _{DC} ~ +30 V _{DC} | |
| Power Consumption | Idle: 75 mA @ 24 V _{DC} ; Data Link: 150 ~ 400 mA (peak) @ 24 V _{DC} | |
| LED Indicators | | |
| System | Red | |
| GPRS | Yellow | |
| Mechanical | | |
| Dimensions | 72 mm x 123 mm x 35 mm (W x H x D) | |
| Installation | DIN-Rail or Wall mounting | |
| Environment | | |
| Operating Temperature | -20 °C ~ +70 °C | -15 °C ~ +55 °C |
| Storage Temperature | -40 °C ~ +80 °C | -20 °C ~ +70 °C |
| Humidity | 5~90% RH, non-condensing | |

Software Specifications


| Functions | |
|-----------------------------|--|
| Rule Configuration Website | Access Web server on WISE controllers to edit and upload logic rules through web browser. |
| 36 IF-THEN-ELSE Logic Rules | 3 IF conditions with AND or OR operators 3 THEN actions and 3 ELSE actions |
| 48 Internal Registers | Hold temporary variables and read/write data via Modbus/TCP address. |
| 12 Timers | Delay / Timing functions. |
| 12 Schedules | Setup prescheduled routine tasks. |
| 12 SMS | Send SMS to pre-set mobile phone numbers. |
| 12 Emails | Send Email messages to pre-set Email receivers. |
| 12 CGI Commands | Send pre-set CGI commands. |
| 12 Recipes | Set up THEN/ELSE action groups. |
| 8 P2P remote modules | Set up the connection information for the remote WISE modules. |
| Modbus/TCP Protocol | Real time control and monitoring I/O channels and system status of controllers via SCADA software. |

| IF Conditions | |
|-------------------|---|
| DI Channel | ON - OFF - ON to OFF - OFF to ON - Change |
| AI Channel | |
| Internal Register | = > < > = < = (value) |
| DI Counter | = > < > = < = (value) - Change |
| DO Counter | |
| Timer | Timeout - Not Timeout |
| Schedule | In Range - Out of Range |
| P2P | DI - AI - DI counter - DO counter - IR |
| Rule Status | Enable - Disable |




| THEN / ELSE Actions | |
|---------------------|-------------------------|
| DO Channel | ON - OFF - Pulse Output |
| Internal Register | Change the value |
| DI Counter | Reset |
| DO Counter | |
| Timer | |
| Schedule | Start - Stop |
| SMS | |
| Email | Send |
| CGI Commands | |
| Recipe | Execute |
| P2P | DO(On/Off) - AO - IR |
| Rule Status | Enable - Disable |

Pin Assignment

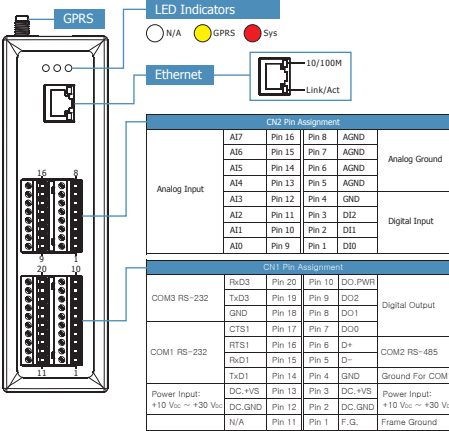


Wire Connection


Digital Input Wire Connection

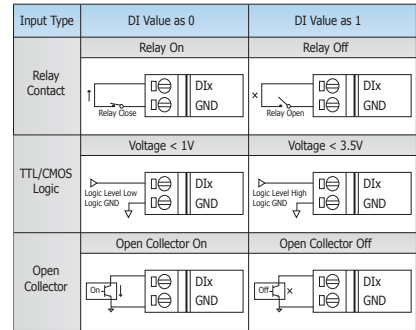


Digital Output Wire Connection

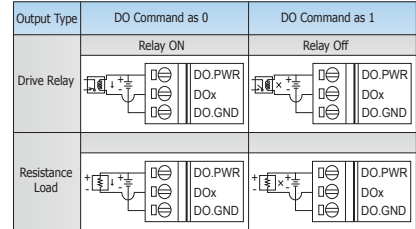

Current Input Wire Connection



Dimensions (Unit: mm)

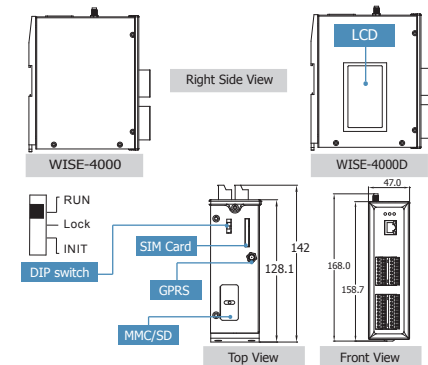

Ordering Information

| | |
|------------|--|
| WISE-4000 | 3-channel DI, 3-channel DO, and 8-channel AI WISE Controller with GPRS/GSM Module (RoHS) |
| WISE-4000D | 3-channel DI, 3-channel DO, and 8-channel AI WISE Controller with GPRS/GSM Module and LCD Display (RoHS) |

Accessories

| | |
|------------|------------------------------|
| ANT-421-01 | 3m external GPRS/GSM antenna |
|------------|------------------------------|