




The WADE-2221 is a rugged and stylish barebone system suitable for embedded applications that stand alone or are rackmounted. Its effective ventilation is achieved by the mesh design of the front panel. No actual tool is needed to release the top cover of chassis, simplifying integration and field service.

This barebone system includes a WADE series board, 150-watt power supply, 2.5" drive bay and one PCI expansion slot. A 2U rackmount tray is specially designed to hold two units side-by-side and converts them to the rackmount platform.

FEATURES

- Integrated with various Mini-ITX board
- One PCI expansion slot
- Tool-free mechanism to open the top cover
- Rugged and stylish design
- Quick 2.5" HDD installation by releasing the top cover
- Built-in VGA/LAN/USB/COM ports
- Two side-by-side units to form two systems in 2U rackmount form factor

REAR I/O

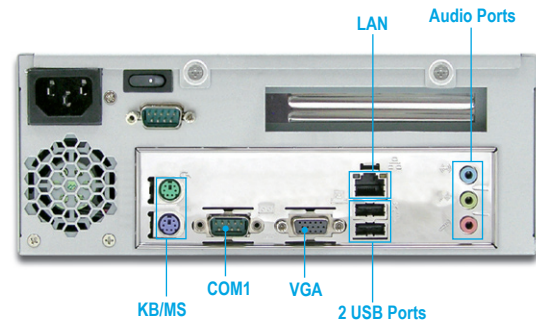

POWER SUPPLY		FSP150-50PLA optional
Input Voltage	90V ~ 264V AC, full range	
Input Frequency	47 ~ 63 Hz	
Input Current	5A@115V, 3A@230V	
Efficiency	>68%	
Holdup Time	20ms. at full load@25°C	
Over Voltage Protection	+5V@5.7~6.5V; +3.3@3.7~4.5V; +12V@13.3~+5.6V	
Over Power/Load Protection	Output power over to 110%~140%	
MTBF	100,000 hrs	
EMI & Safety Approval	UL, TUV, CE, FCC, CB, CSA, SEMKO, FIMKO, NEMCO, DIMCO	
Temperature/Humidity	Operating: 0 ~ 50°C, 20 ~ 85%RH Storage: -40 ~ 70°C, 10m ~ 90%RH	
Dimension (WxDxH)	150x81.6x40.6 mm; 5.9"x55.5"x3.4"	

MECHANICAL & ENVIRONMENTAL	
Operation Temperature	0~50°C
Storage Temperature	-20~80°C
Relative Humidity	5~95% non-condensing
Dimension	226 x 221.8 x 86.3 (mm)
Weight	3.5 Kg

ORDERING GUIDE

- **WADE-2221-150X**
Rugged and stylish industrial Mini-ITX Bare-bones Chassis with 150W active PFC PSU
- **WADE-2221A-180X**
Rugged and stylish industrial Mini-ITX Bare-bones Chassis with 150W active PFC PSU