


CAL-208X

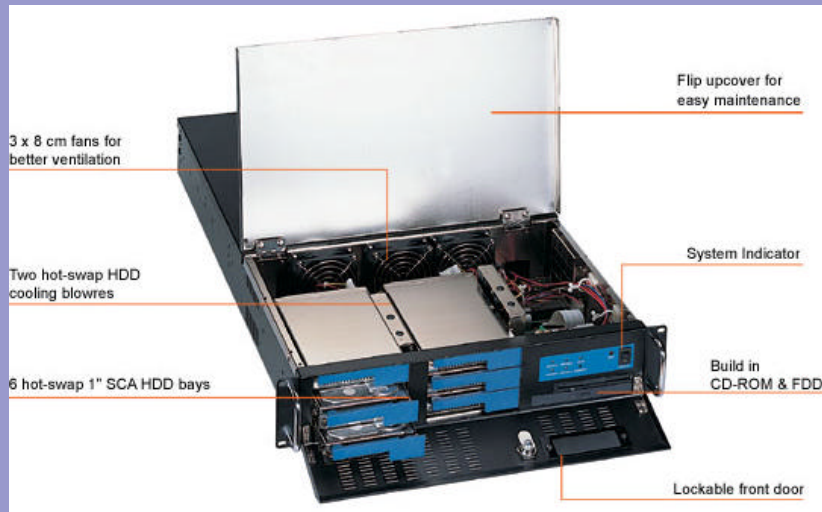

2U Server Chassis for ATX Mother Board

Features

- ◆ Meets EIA RS-310C Standard
- ◆ Excellent cooling design
- ◆ Equipped with 300W ATX redundant PSU
- ◆ Supports 6 hot-swap HDD cooling blowers
- ◆ Lockable front door
- ◆ Flip up cover for easy maintenance

CAL-208X

Specifications

Standard

EIA RS-310C 19" Rack mount standard

Dimension

424(W) x 670(D) x 88(H) mm

Chassis

Heavy duty Steel with Ni plating

Front Door

1 x styling front door

Main Board

Intel STL size server board or WATX (13.0" x 12.0") server board or ATX main board

Drive Bays

1 x slim CD-ROM
1 x slim FDD
6 x 1" height hot-swap HDD space

Power Supply

300W + 300W ATX redundant PSU (PFC)

Cooling System

System: 3 x 8 cm two ball bearing fans (42.5) CFM
Drive: 2 x 5 cm hot-swap blowers

Front Panel Control

1 x master door latch
1 x master power ON switch
1 x master reset switch
1 x alert reset switch

System Indicator

1 x Fan Fail LED
4 x Overheat LED
6 x HDD Power LED
6 x HDD Access LED

Colour

Black or Beige

I/O port

2 x 68 pin Ultra SCSI port (Rear)

Environmental Monitoring & Alert

4 x thermal sensor (on/off setting adjustable 50/60/70°C)
5 x fan fail detector (on/off setting adjustable)
1 x fan fail and overheat reset switch

Speaker

1 x 8Ω system speaker

Environmental

Operating - Temperature: 0 to 55°C
Non-Operating—Temperature: 0 to 70°C

Accessory

3 slot 32 bit riser card (64 bit ready)

Emission

Chassis designed to meet CE and FCC

Gross Weight

22.3 KG

Order Information

CAL-208X-00-BLK
CAL-208X-00-BGE
CAL-208X-2326P-BLK
CAL-208X-2326P-BGE