


MPE-8071

70W universal input open frame power supply

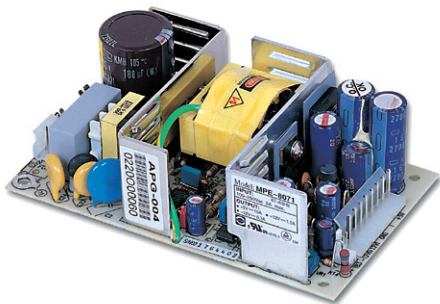

SPECIFICATION

Input Voltage	90V ~ 132V, 180V ~ 264V AC Auto-range
Input Frequency	47 ~ 63 Hz
Input Current	2A@115V; 1A@230V
Efficiency	> 70%
Holdup Time	16 ms at full load
Over Voltage Protection	+5V: 5.6 ~ 6.6V; +3.3V: 3.6 ~ 4.2V; +12V: 13.2 ~ 14.6V
Over Power/Load Protection	Output power over 110% ~ 160%
MTBF	130,000 hrs
EMI & Safety Approval	UL, cUL, TUV, CE, FCC
Temperature/Humidity	Operating: 0 ~ 50°C, 20 ~ 90%RH Storage: -40 ~ 85°C, 5 ~ 95%RH
Dimension (WxDxH)	76.2 x 127 x 38.6 mm; 3" x 5" x 1.5"

FEATURES

- 3" x 5" open frame power supply suitable for node chassis
- Three rails outputs (+5V, +12V & -12V)
- Universal AC input
- Higher +5V output (10A)

ORDERING GUIDE

- **MPE-8071**
70W universal input open frame power supply

DC OUTPUT

	5V	+12V	-12V
Max. Load	12A	2.5A	0.3A
Min. Load	0A	0A	0A
Load Reg.	±3%	±4%	±5%
Line Reg.	±2%	±2%	±2%
Ripple	±1%	±1%	±1%
Noise	±1%	±1%	±1%